
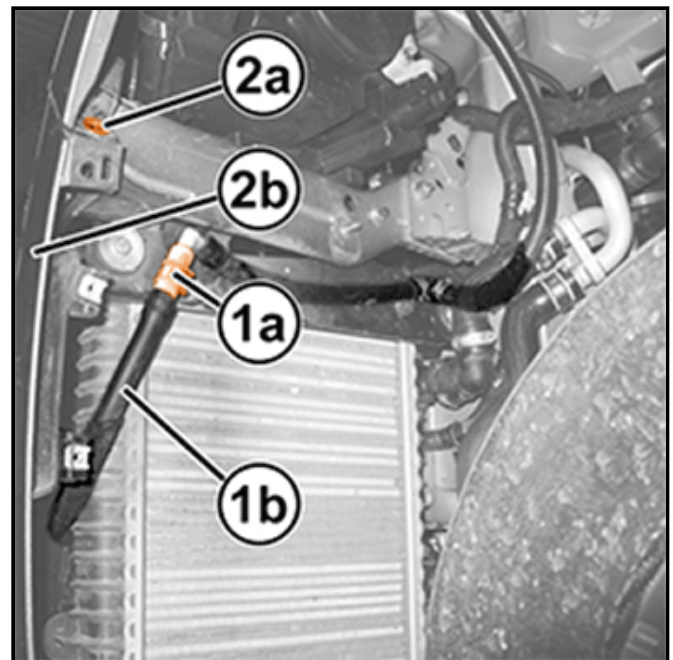



2.0L REMOVAL AND INSTALLATION

REMOVAL

1. Raise and support the vehicle, ([Refer to 04 - Vehicle Quick Reference/Hoisting/Standard Procedure](#)).
2. Disconnect and isolate the negative battery cable.
3. Remove the left and right front wheel and tire assemblies ([Refer to 22 - Tires and Wheels/Removal and Installation](#)).
4. Remove the left and right front wheelhouse splash shields front halves([Refer to 23 - Body/Exterior/SHIELD, Splash, Front Wheelhouse/Removal and Installation](#)).
5. Working on the right side of the bumper, remove the parking sensors electrical connection (1a) from the slide seat and separate the connector.
6. Remove the fascia (2b) retaining screw (2a).
7. If equipped, working on the left side of the fascia, disconnect the headlamp washer hose (1b) quick connect coupler (1a).
8. Remove the retaining screw (2a) from the fascia (2b).

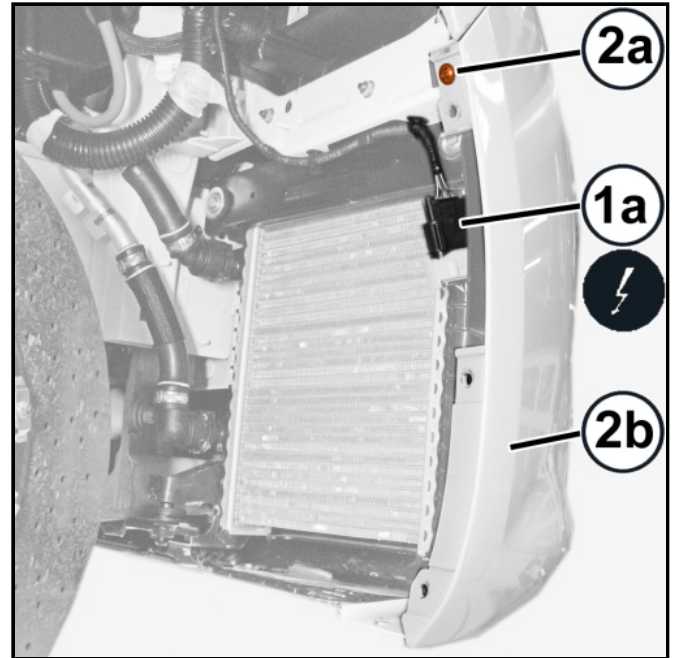


9. Remove the mounting screws (1a) and (2a) from the engine belly pan (2b).
10. Remove the fascia (3b) lower mounting screws (3a).

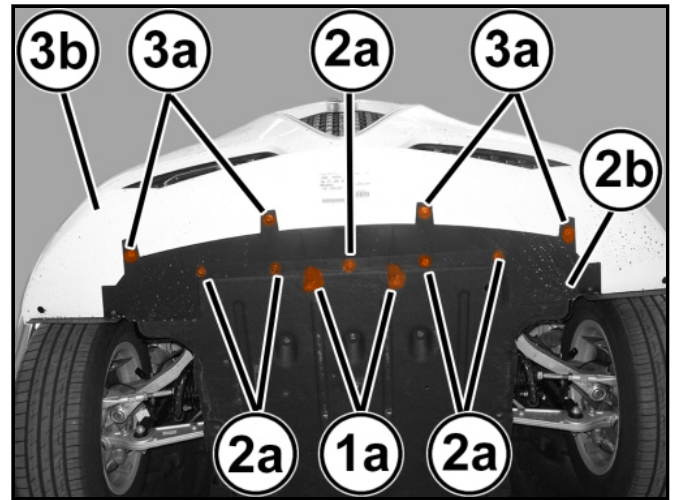



11. Remove the upper mounting screws (1a) from the fascia (1b).

12. Using the appropriate trim tool, remove the retaining clips (2a).

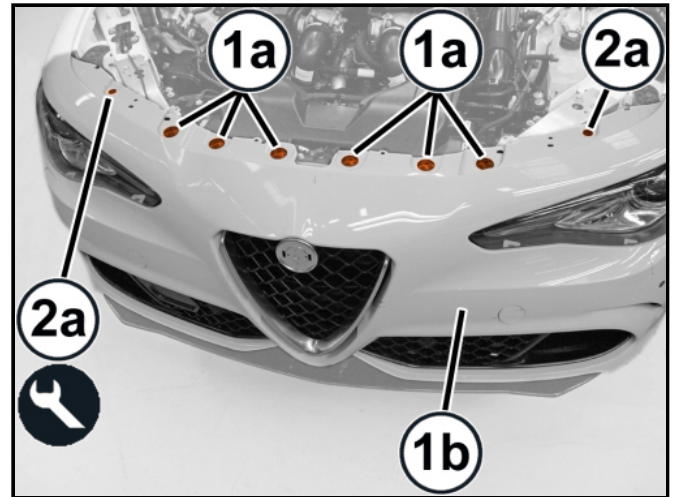


13. Release the side retainers (1a) from both sides of the front fascia.

14. Remove the front fascia.

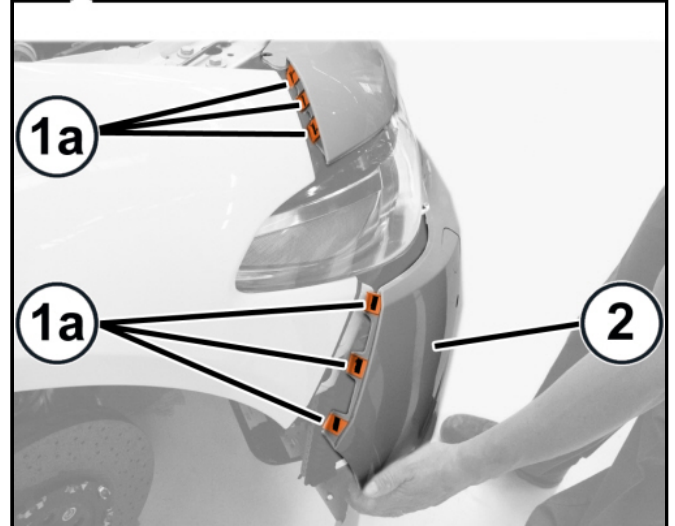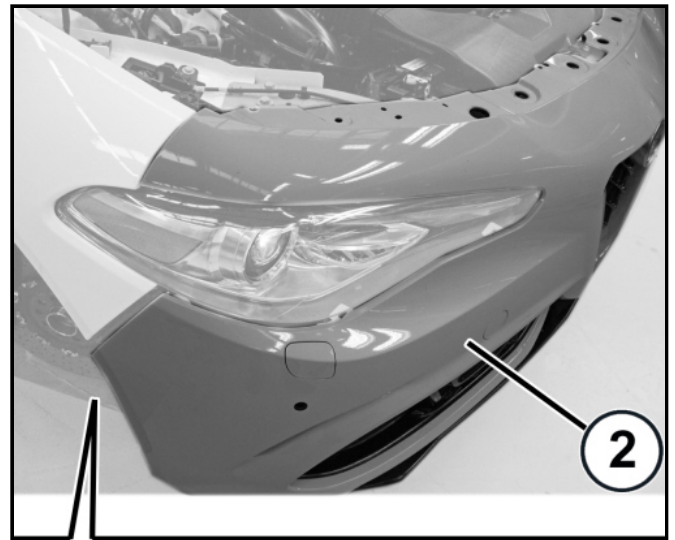

INSTALLATION


1. Position the fascia in place and secure the side retainers.
2. Install the retaining clips (1).
3. Install the fascia mounting screws (2a) and secure to proper [Torque Specifications](#).

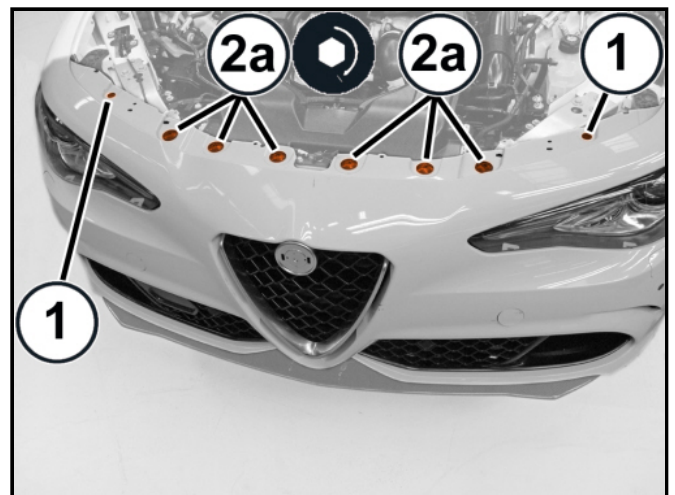

4. Install the lower front fascia mounting screws (1) and tighten securely.


5. Install the engine belly pan mounting screws (2) and tighten securely.

6. Install the push pin fasteners (3).

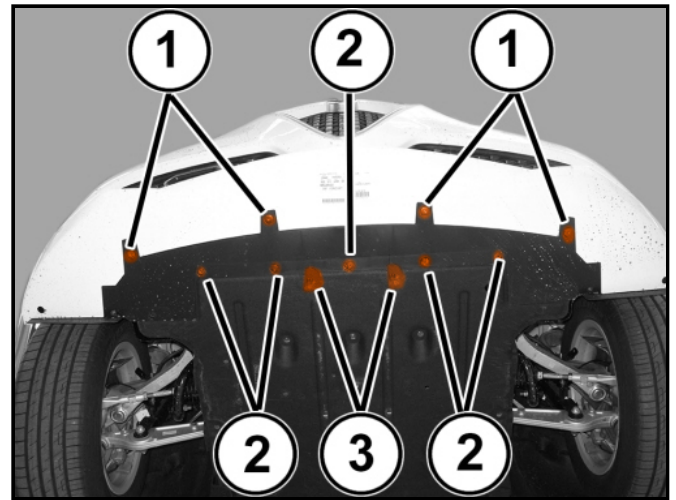

7. Position the fascia (2b) and securely tighten the screw (2a).

8. If equipped, connect the front headlight washer hose (1b) quick coupler (1a).

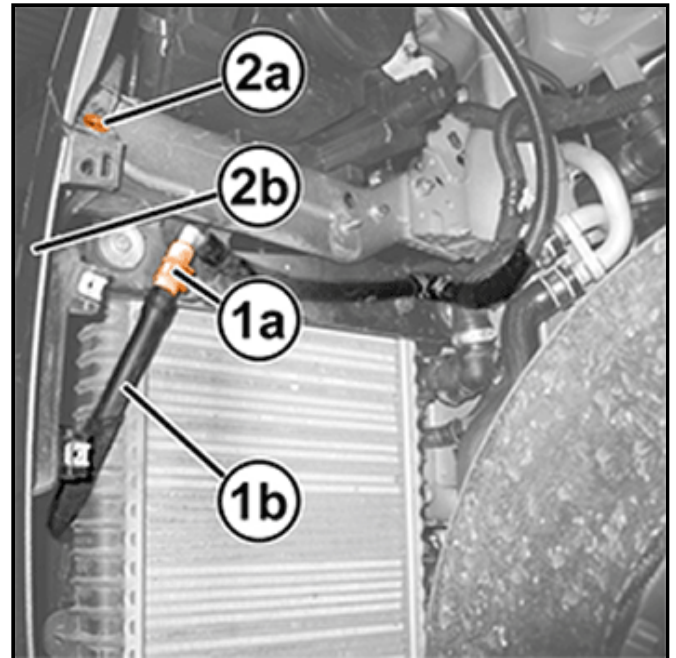

9. Install and securely tighten the screw (1a).

10. Connect the parking sensors electrical connection (2a) and secure in the slide seat.

11. Install the left and right front wheelhouse splash shields front halves ([Refer to 23 - Body/Exterior/SHIELD, Splash, Front Wheelhouse/Removal and Installation](#)).

12. Install the left and right front wheel and tire assemblies ([Refer to 22 - Tires and Wheels/Removal and Installation](#)).

